


# AE DOUBLE-GLASS MODULE

## AE DGM6-60 Series 285W-300W



We produce with green energy!

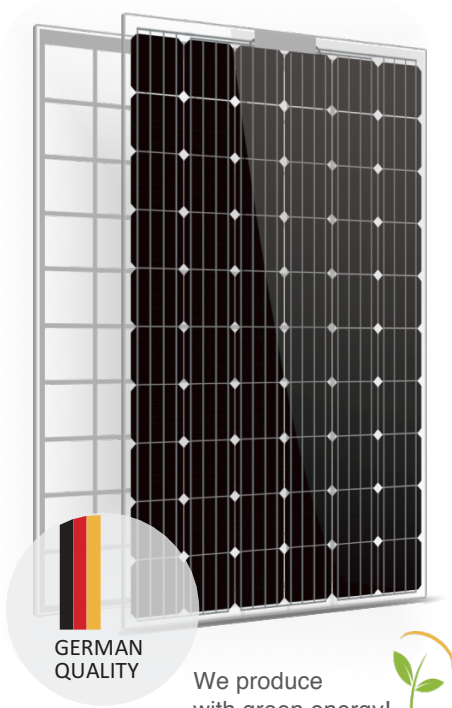

### LIGHTEST DOUBLE-GLASS MODULE WORLDWIDE

Ultra-thin thermally strengthened with 2mm glass



### HARSH WEATHER RESISTANCE

Absolute water-proof, anti-corrosion by acid, alkaline and ammonia, anti-friction, better thermal dissipation and 30+ years hassle free performance



### PID FREE

Potential induced degradation (PID) Free Guaranteed



### MICRO-CRACK FREE

No micro-cracks during rough transportation, complicated handling at installation and during lifetime module operation



### FIRE CLASS A

Glass-Glass design protects the module from the damages caused by arc and hot spots, eliminating potential dangers of fire



### SELF-CLEANING EFFECT

Frameless design, no dirt at the edges of frame



### GERMAN QUALITY

AE Solar photovoltaic modules are manufactured using high-quality materials, automated machine, German Technology and Standards



### PLUS-SORTING

Higher yield due to plus-sorting of 0 to +5W guarantees the high system efficiency and yield stability



### PERFORMANCE GUARANTEE


AE Solar assures high investment, security and warranty claims by providing linear performance guarantee of 30 years and 12 years of product warranty



### CERTIFICATES

Lining with International Standards, AE Solar Photovoltaic modules are tested and certified under extreme stress and it can bear harsh environmental influences

### OUR PERFORMANCE GUARANTEE

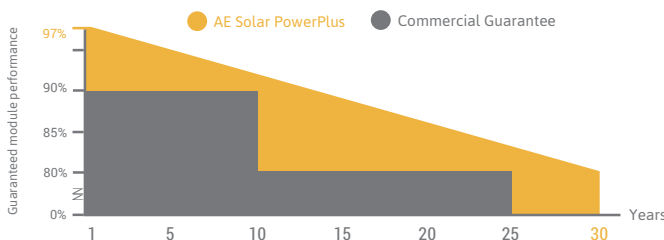

**AE SOLAR**  
Messerschmittring 54  
86343 Königsbrunn  
Germany

Tel.: +49 8231 97 82 68 0  
Fax.: +49 8231 97 82 68 9

E-Mail: [info@ae-solar.com](mailto:info@ae-solar.com)  
Web: [www.ae-solar.com](http://www.ae-solar.com)

### TECHNICAL DATA



		AE285DGM6-60	AE290DGM6-60	AE295DGM6-60	AE300DGM6-60
Maximum power	Pmax(Wp)	285	290	295	300
Maximum power voltage	Vmp(V)	32.06	32.44	32.82	33.08
Maximum power current	Imp(A)	8.89	8.94	8.99	9.07
Open-circuit voltage	Voc(V)	39.21	39.65	39.84	40.01
Short-circuit current	Isc (A)	9.34	9.45	9.51	9.64
Module efficiency	%	17.3	17.6	17.9	18.2
Power tolerance	Pmax(W)	- 0 / + 5			
Maximum system voltage DC	V	1000			
Operating temperature	°C	-40 to +85			
Temperature coefficients of Pmax	%/°C	-0.40			
Temperature coefficients of Voc	%/°C	-0.30			
Temperature coefficients of Isc	%/°C	0.034			
Nominal operating cell temp. (NOCT)	°C	45±2			

The electrical data apply to standard test conditions (STC): Irradiance of 1000 W/m<sup>2</sup> with spectrum AM 1.5 and a cell temperature of 25°C.

### MATERIAL CHARACTERISTICS

Cell Type	Mono-crystalline
Cell Dimension	156.75mm × 156.75mm
Module Dimension	1662mm × 990mm × 5mm (J-box not included)
Weight	19.6kg
Front Glass	2mm tempered AR glass
Encapsulant	POE
Back Glass	2mm tempered glass / 2mm ceramic coated glass
Junction Box	IP67 (three bypass diodes)
Cable	4.0mm <sup>2</sup>
Connector	LCS-R1 (MC4 equivalent)
Wind load	2400Pa / 244kg / m <sup>2</sup>
Mechanical load	5400Pa / 550kg / m <sup>2</sup>

### DRAWINGS & PERFORMANCE

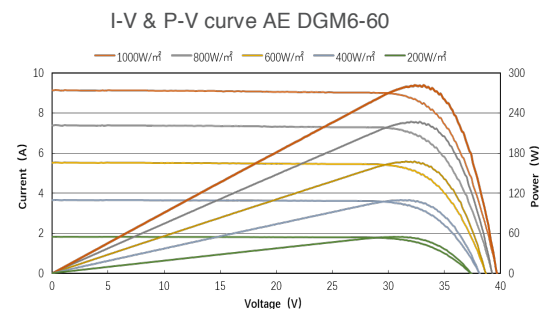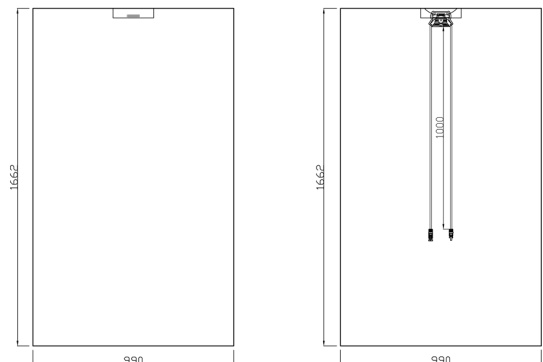

Excellent performance at 200W/m<sup>2</sup>(AM 1.5, 25 °C): the conversion efficiency could be 96.6% of STC

### PACKAGING INFORMATION

Packing configuration	38pcs / pallet
Loading capacity	988pcs / 40HQ

