


Diesel Generator Set

18V2000 DS1290

Water charge-air cooling/1160kVA/50 Hz/
prime power (fuel consumption optimized)/380 - 415V

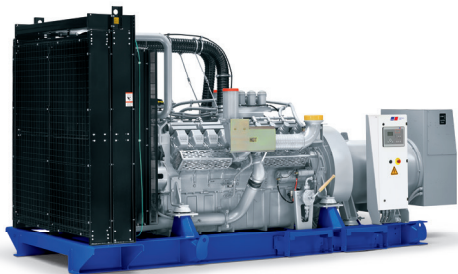

Optional equipment shown. Standard equipment and colors (base frame, generator: grey, engine: blue) may vary.

Product highlights

Benefits

- Low installation costs
- Best fuel consumption values
- Long maintenance intervals
- Best-in-class reliability and availability
- Lifting vertically or with diagonal pull
- Compact design

System ratings ¹⁾

Prime power	18V2000 DS1290	18V2000 DS1290	18V2000 DS1290
Voltage (L-L)	380V	400V	415V
Phase	3	3	3
PF	0.8	0.8	0.8
Hz	50	50	50
kW	928	928	928
kVA	1160	1160	1160
Amps	1762	1674	1614
Generator model	740RSL7076	740RSL7076	740RSL7076
Temp rise	125°C/40°C	125°C/40°C	125°C/40°C
Connection	6 LEAD HI WYE	6 LEAD HI WYE	6 LEAD HI WYE

¹⁾ Power available up to 40°C/400 m

Certifications and standards

- Engine-generator set is designed and manufactured in facilities certified to standards ISO 9001:2008 and ISO 14001:2004
- Performance Assurance Certification (PAC)
 - Engine-generator set tested according to ISO 8528-5 for transient response
 - Verified product design, quality and performance integrity
 - All engine systems are prototype and factory tested
- Power rating
 - Permissible average power output during 24 hours of operation up to 75%

Standard equipment¹⁾

Engine

- Air filters
- Oil pump for draining
- Full flow oil filters
- Closed crankcase ventilation
- Jacket water pump
- Thermostats
- Exhaust manifold – dry
- Belt driven radiator fan
- Electric starting motor – 24V
- Governor – electronic isochronous
- Base – formed steel
- SAE flywheel & bell housing
- Charging alternator
- Flexible fuel connectors
- Flexible exhaust connection

Generator

- NEMA MG1, IEEE and ANSI standards compliance for temperature rise and motor
- VDE 0530, IEC 60034-1, BS4999, BS5000, CSA22.2-100, AS 1366
- Sustained short circuit current of up to 250% of the rated current for up to 10 seconds
- Self-ventilated and drip-proof according to IP23
- Superior voltage waveform
- Digital, volts-per-hertz regulator
- No load to full load regulation
- Brushless alternator with brushless pilot exciter
- 4 pole, rotating field
- 125 °C maximum prime temperature rise
- Heavy duty shielded ball bearings with a minimum B-10 life of 40,000 hrs
- Flexible coupling
- Full amortisseur windings
- 3-phase voltage sensing
- ±0.25% voltage regulation
- 100% of rated load – one step according to NFPA 110
- 3% maximum harmonic content

Standard features¹⁾

- The engine-generator set complies to G3
- Engine generator set tested according to ISO 8528-5 for transient response
- Accepts rated load in one step as per NFPA 110
- All engine-generator sets are type and factory tested
- Global product support
- 18V2000 diesel engine (35,82 liter (2186 cu inch) displacement; 4-stroke)
- Engine-generator resiliently mounted
- Complete range of accessories
- Brushless, rotating field generator (PMG excitation; 250% short circuit capability; 2/3 pitch stator windings)
- Complete system metering
- LCD display

1 Represents standard product only. Consult your local MTU distributor for additional configurations.

Application data

Engine

Manufacturer	MTU
Model	18V2000G65TB
Type	4-stroke
Arrangement	18V
Displacement/cylinder: l (cu inch)	1.99 (121)
Bore: mm (inch)	130 (5.1)
Stroke: mm (inch)	150 (5.9)
Compression ratio	16:1
Rated speed: rpm	1500
Engine governor	electronic isochronous
Max power: kWm (bhp)	1000 (1341)
Speed regulation	±0.25%
Air filter	dry

Lube oil capacity

Total oil system: l (gal)	130 (34)
---------------------------	----------

Electrical

Electric volts DC	24
Cold cranking amps under -17.8°C (0°F)	1000

Fuel system

Fuel supply connection size	M22 x 1,5 - 60°/male
Fuel return connection size	M12 x 1,5 - 60°/male
Maximum fuel lift: m (ft)	5 (16)
Recommended fuel	see MTU fluids & lubrication spec.
Total fuel flow: l/hr (gal/hr)	600 (159)

Fuel consumption¹⁾

	gal/hr	l/hr	g/kwh
At 100% of power rating:	64	243	202
At 75% of power rating:	48	181	200
At 50% of power rating:	32	123	204

Cooling/radiator system

Water pump capacity: l/min (gpm)	667 (176)
Heat rejection to coolant: kW (BTUM)	425 (24,169)
Heat rejection to after cooler: kW (BTUM)	215 (12,227)
Heat radiated to ambient: kW (BTUM)	50 (2,843)
Engine coolant capacity: l (gal)	140 (37)

Air requirements²⁾

Aspirating: m ³ /min (SCFM)	69 (2434)
--	-----------


Exhaust system

Gas temp. (stack): °C (°F)	555 (1031)
Gas volume flow temp: m ³ /min (SCFM)	198 (6991)
Maximum allowable back pressure: kPa	8.5

¹ Values in accordance with ISO 3046-1. Conversion calculated with fuel density of 0.83 g/ml.

² Air density = 1.184 kg/m³ (0.0739 lbm/ft³)

Weights and dimensions

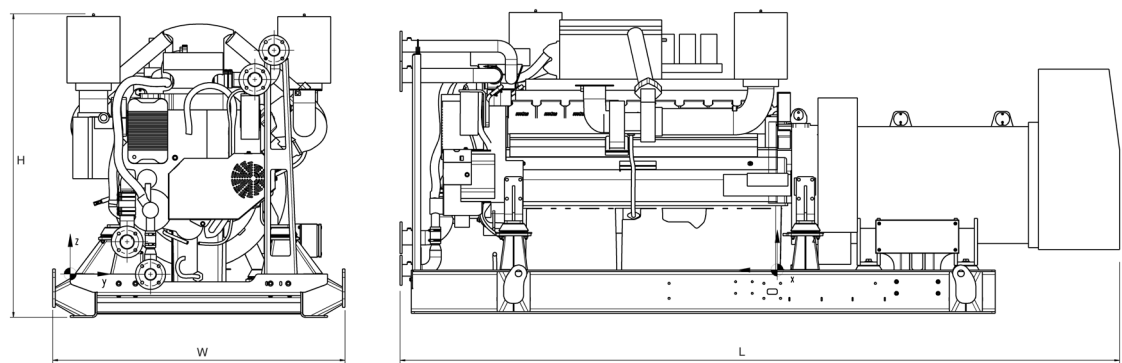

Drawing above for illustration purposes only, based on standard open power 400 Volt engine-generator set. Lengths may vary with other voltages. Do not use for installation design. See website for unit specific template drawings.

System	Dimensions (L x W x H)	Weight (dry/less tank)
Open power unit (OPU)	4325 x 1750 x 1821 mm (170.3 x 69 x 71.7 inch)	6478 kg (14,283 lbs)

Weights and dimensions are based on open power units and are estimates only. Consult the factory for accurate weights and dimensions for your specific engine-generator set.

Sound data

— Consult your local MTU distributor for sound data.

Emissions data

— Consult your local MTU distributor for emissions data.

Rating definitions and conditions

- Prime power ratings apply to installations where utility power is unavailable or unreliable. At varying load, the number of generator set operating hours is unlimited. A 10% overload capacity is available for one hour in twelve. Ratings are in accordance with ISO 8528-1, ISO 3046-1, BS 5514 and AS 2789. Average load factor: ≤ 75%.
- Consult your local MTU distributor for derating information.